


LINEAR LIGHT
LED LINEAR WALL WASH LIGHT

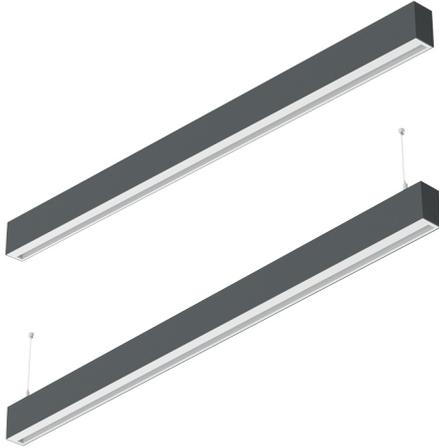

Project:

Location:

Cat No:

Type:

Qty:

Notes:

About:


Extruded aluminum linear light with suspended and surface mounting options meeting the highest requirement in terms of architecture and lighting technology.

SKU: AOLF-LR-004-LAC001-04-3.2

LUMENS	CCT	CRI	MOUNTING	FINISH
<input type="text"/> 24-2400 (36W)	<input type="text"/> 27-2700K	<input type="text"/> 80	<input type="text"/> MS-Surface	<input type="text"/> AN-Anodized Aluminum
<input type="text"/> 25-2500 (36W)	<input type="text"/> 30-3000K	<input type="text"/> 90	<input type="text"/> MP-Suspended	<input type="text"/> WH-White
<input type="text"/> 26-2600 (36W)	<input type="text"/> 40-4000K			<input type="text"/> BL-Black

LINEAR LIGHT LED LINEAR WALL WASH LIGHT

Dimensions

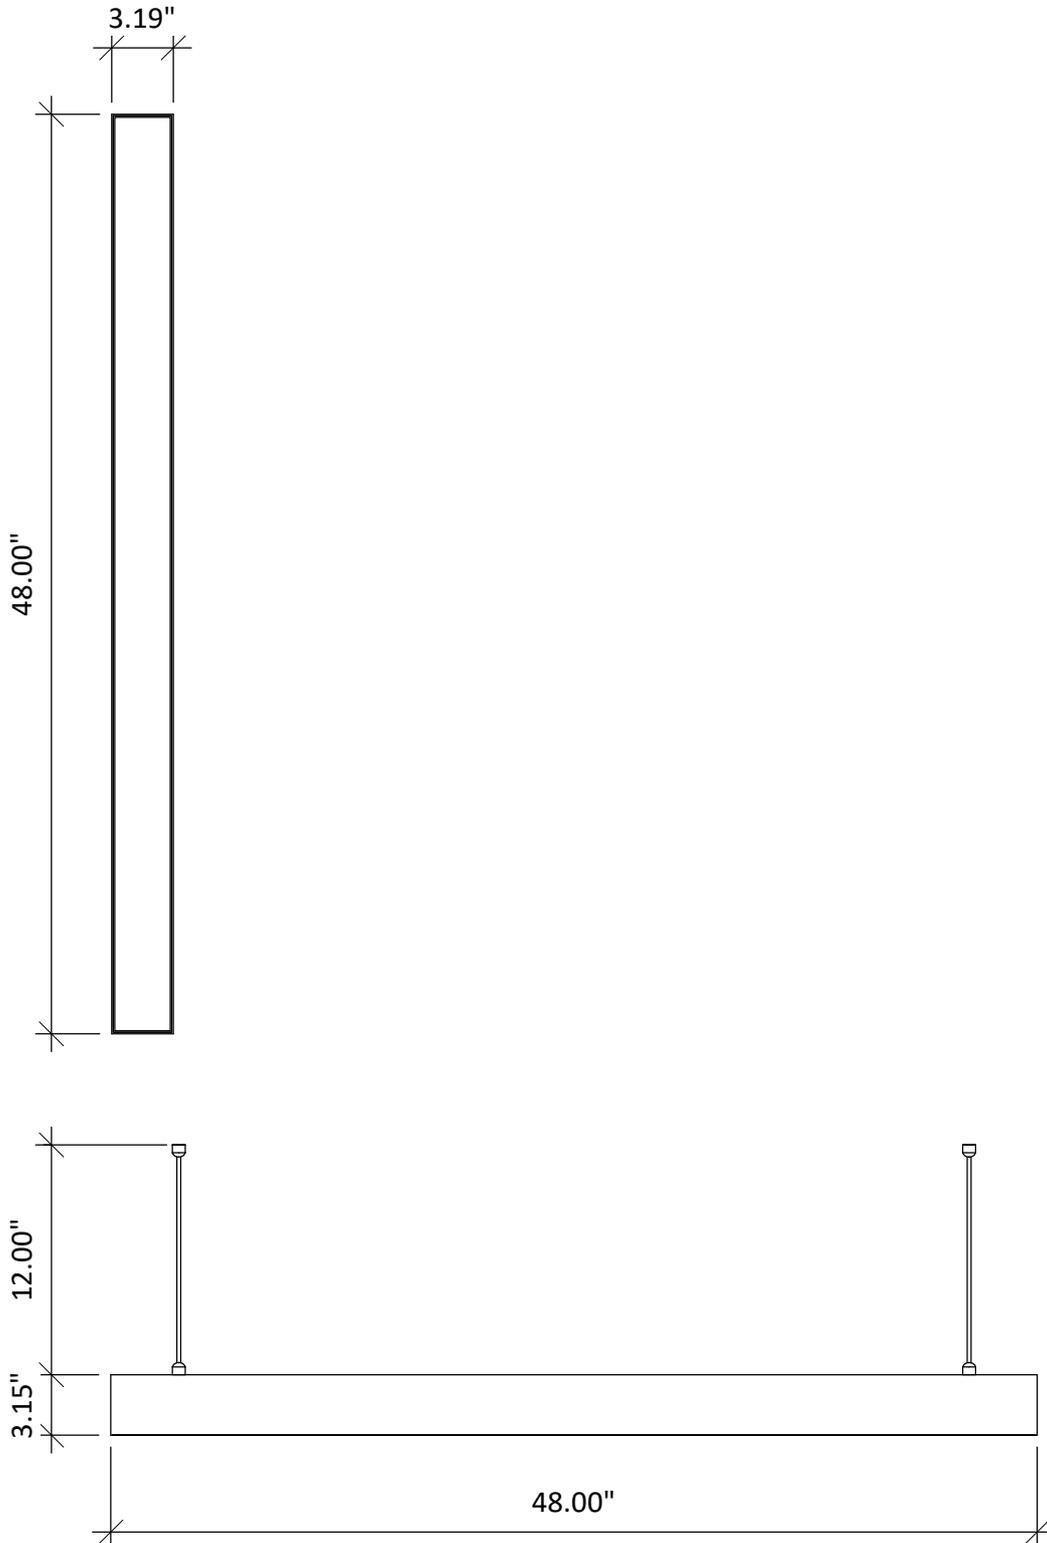

LINEAR LIGHT LED LINEAR WALL WASH LIGHT

FEATURES:

- Profile system made of extruded aluminum.
- Various lighting modules for multiple lighting applications.
- Tool-free inserts mounting by clip-in mechanism.
- Standard and customized length of module and cover.
- Magnetic end caps.
- The end of the front profile and the open end of the following profile can be seamlessly connected.

APPLICATION:

- Hotel Lobby, Hallways, offices, Meeting rooms, conference rooms, etc.

WARRANTY:

- 3 Years

TECHNICAL CHARACTERSTICS:

Input Power	36W
Input Voltage	100V to 277V AC
Material	Die cast Aluminum
UGR	<19
Mounting Options	Surface, Suspended
Certifications	ETL, cETL, DLC