

EMERGENCY LIGHT

LED DUAL HEAD EMERGENCY LIGHT



Project:

Location:

Cat No:

Type:

Qty:

Notes:

About:

Injection molded emergency lights with thermoplastic ABS housing operating at 32°F to 104°F that best suits your needs.


SKU: AOLF-EM-009-MAV001-2W-90-ABS

Material	Injection-Molded Thermoplastic ABS Housing
Input Voltage	120V to 277V AC
Power Consumption	0.5W Max.
Output	2W Max.
Battery	3.6V Nickel Cadmium Battery
Charging Time	24 Hours
Discharge Time	90 Minutes
Operating Temperature	32°F to 104°F
Certificate	UL 94 V-0 Flame Rating

EMERGENCY LIGHT

LED DUAL HEAD EMERGENCY LIGHT

Dimensions

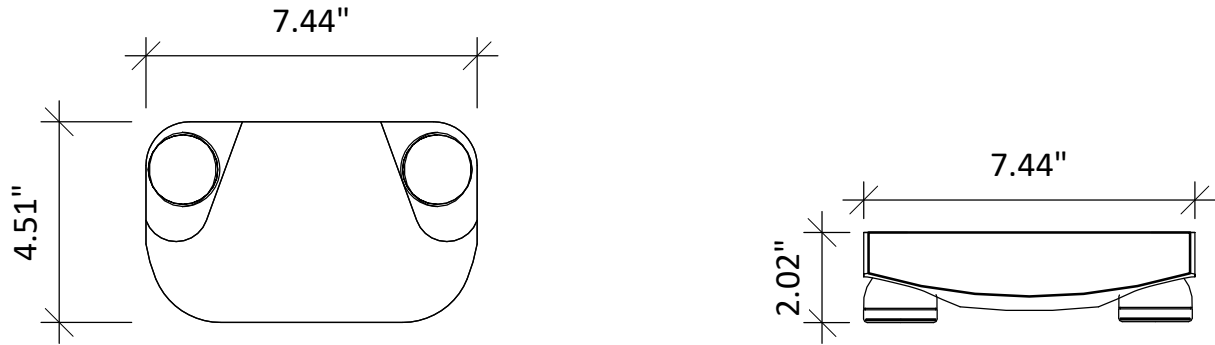

LIGHT DISTRIBUTION

